


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

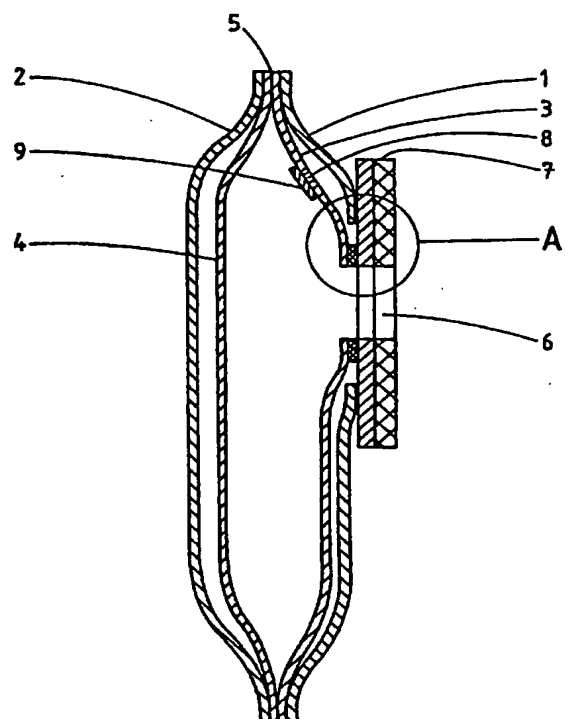

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification⁶ : A61F 5/445</p>	<p>A1</p>	<p>(11) International Publication Number: WO 96/01090 (43) International Publication Date: 18 January 1996 (18.01.96)</p>
<p>(21) International Application Number: PCT/GB95/01424 (22) International Filing Date: 19 June 1995 (19.06.95) (30) Priority Data: 9413231.3 1 July 1994 (01.07.94) GB (71) Applicant (for all designated States except US): WELLAND MEDICAL LIMITED [GB/GB]; 7 Brunel Centre, Newton Road, Crawley, West Sussex RH10 2TU (GB). (72) Inventor; and (75) Inventor/Applicant (for US only): SMITH, Rory, James, Maxwell [GB/GB]; High Dene, Hebden, Nr. Skipton, North Yorkshire BD23 5EB (GB). (74) Agents: HUTCHINS, Michael, Richard et al.; Fry Heath & Spence, The Old College, 53 High Street, Horley, Surrey, RH6 7BN (GB).</p>		<p>(81) Designated States: CA, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>
<p>(54) Title: OSTOMY BAG LINER</p> <p>(57) Abstract</p> <p>The invention provides a biodegradable, flushable ostomy bag liner comprising: inner walls (3, 4) formed from polyvinylacetate/polyvinylalcohol film of a grade which disintegrates within 60 seconds in water at 50 °C, but retains its structural integrity in water at 25 °C for at least two days; outer walls (1, 2) formed from a non-woven fabric which disintegrates in water at 25 °C; means defining an opening (8) in the inner and outer walls for receiving bodily waste from the stoma of a patient; and adhesive flange (7) for securing the ostomy bag liner to the body wall of a patient, the adhesive flange (7) being secured to at least an inner wall (1) of the liner and surrounding the said opening (8); wherein the inner and outer walls (1, 2, 3, 4) are unconnected and form a non-laminar arrangement over the greater part of their area, but are connected together around their peripheral margins (5) and in the region of the adhesive flange (7).</p> 		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

OSTOMY BAG LINER

This invention relates to a biodegradable, flushable, ostomy bag liner.

Ostomy bags for receiving bodily waste from colostomy or ileostomy patients are well known and a major problem with such bags is that it can be difficult to dispose of the used bag in a convenient and hygienic manner. Often, the contents of used bags are removed by cutting an edge of the bag and depositing the contents into a W.C. for flushing away, leaving the soiled bag for separate disposal, e.g. by incineration or by wrapping and placing in a waste bin. Disposal of a used bag and its contents in this way is clearly unhygienic and unpleasant for the user, and, in recognition of this problem, various proposals have been made for ostomy bags which can be flushed down a W.C.:- see for example GB-A-2083762, EP-A-0388924, GB-A-2227668, and GB-A-2193925. Many of the known types of disposable ostomy bag currently available suffer from certain drawbacks. Firstly, due to the buoyancy and relative bulk of the bags, it is often difficult to flush them down a W.C. Secondly, in order to ensure that the bag is sufficiently strong and waterproof to withstand the

rigours of use, materials have been used which do not decompose readily, if at all, in the sewerage system, thereby giving rise to a pollution problem.

Our earlier Application WO-A-94/12128, the contents of which are incorporated by reference herein, seeks to overcome such problems by providing a relatively tough, waterproof detachable outer bag, and a water-impermeable inner bag or liner, the inner bag serving to accommodate the bodily waste whilst the outer bag serves as a protective layer. The inner bag is made sufficiently water-impermeable to prevent leakage into the outer bag during a period of use but, because of the existence of the outer bag, need not be made of such durable material. Thus, it can be made of material which although water-impermeable over a short period, nonetheless gradually dissolves over a more extended period. The inner bag can therefore be made entirely biodegradable and is ideally suited for disposal by flushing down a W.C. The outer bag which is secured to the inner bag by means of a frangible or peelable connection is torn away from the inner bag after use and, since it is not soiled by the bodily waste, can be disposed of with other household refuse.

The present invention is concerned principally, although not exclusively, to improvements in the construction of inner bags suitable for use in the two-bag system disclosed in WO-A-94/12128.

Accordingly, in a first aspect, the invention provides a biodegradable, flushable ostomy bag liner comprising:

3

inner walls formed from polyvinylacetate/polyvinylalcohol film of a grade which disintegrates within 60 seconds in water at 50°C, but retains its structural integrity in water at 25°C for at least two days;

outer walls formed from a non-woven fabric which disintegrates in water at 25°C;

means defining an opening in the inner and outer walls for receiving bodily waste from the stoma of a patient;

an adhesive flange for securing the ostomy bag liner to the body wall of a patient, the adhesive flange being secured to at least an inner wall of the liner and surrounding the said opening; wherein the inner and outer walls are unconnected and form a non-laminar arrangement over the greater part of their area, but are connected together around their peripheral margins and in the region of the adhesive flange.

The non-woven fabric is preferably formed from biodegradable fibres. Typically the fibres making up the non-woven fabric will have an average length of less than 8mm, preferably less than 6mm, and more preferably approximately 5mm.

The non-woven fabric may contain cellulose based fibres and a water-soluble/water-disintegrable polymer capable of binding the fibres. An example of a water-soluble/water-disintegrable polymer suitable for this use is PVA which may be in fibre form. Examples of cellulose based fibres are fibres formed from rayon, cellulose acetate, or cotton.

The cellulose fibres can be present in a ratio of at least 5:1 weight ratio with regard to the polymeric binder, more preferably at least 10:1, for example approximately 20:1.

Instead of cellulosic fibres, wholly synthetic fibres such as polyester fibres, or a blend of cellulosic and synthetic fibres, may be used.

The non-woven fabric may conveniently be made on paper making apparatus by mixing together the fibres and polymeric binder in the form of an aqueous slurry and depositing the slurry on to a water-pervious moving conveyor, removing water from the slurry by drawing it through the conveyor, and transporting the mixture through an oven to cure the mixture.

If a non-woven fabric of the aforementioned type comes into contact with water, the polymeric binder dissolves, thereby destroying the binder-cellulosic fibre bond, and the fabric falls apart.

The inner walls of the liner typically are constituted by a pair of sheets of the polyvinylacetate/polyvinylalcohol film welded or adhesively secured together around their peripheral margins. The outer walls of the liner are constituted by a pair of sheets of the non-woven material which are secured, e.g. by welding or adhesive bonding, to the outer surfaces of the inner walls (e.g. the PVA film) at the peripheral margins. The inner and outer walls are also connected together, in the region of the adhesive flange. For example, they may be connected

together by virtue of both being secured (e.g. by welding or adhesive bonding) to the rear surface of the adhesive flange. However, between the area of connection on the adhesive flange, and the peripheral margins of the ostomy bag, the inner and outer walls are substantially unconnected.

The inner and outer walls are preferably formed of such material, and have such thickness, as to be of substantially equivalent mechanical strength. In the present context, the term "substantially equivalent mechanical strength" means that the tensile strengths of the two walls in the dry state differ by no more than about 20%.

An embodiment of the present invention will now be illustrated by reference to the accompanying drawings in which:-

Figure 1 is a plan view of an ostomy bag liner according to one embodiment of the present invention;

Figure 2 is a sectional elevation along line I-I in Figure 1; and

Figure 3 is an enlarged view of the region marked A in Figure 2.

Referring now to the drawings, it can be seen that an ostomy bag liner according to the present invention comprises outer walls 1, 2 and, enclosed therein, inner walls 3, 4. Inner walls 3, 4 are sealed together by heat welding at the peripheral margin 5, outer walls 1, 2 being welded to the outer surfaces of the inner walls 3, 4, also

at the peripheral margins.

The liner has an opening 6 through which the stoma (not shown) of a patient may protrude. In order to secure the liner to a body wall of the patient, an adhesive flange 7 is provided.

The inner wall 3 and outer wall 1 are each secured to the rear surface of adhesive flange 7, the inner wall 3 being secured to the flange at a position radially inwardly of the outer wall 1.

The liner is also provided with a flatus gas venting system comprising an opening 8 in the inner wall 3 which is covered by a disc 9 of gas-permeable hydrophobic polyurethane foam material. Outer wall 1, being of a fibrous nature rather than being in the form of a film, is fully permeable to gases.

The outer walls 1, 2 are formed from a non-woven material comprising rayon fibres and PVA in the ratio 20:1. The rayon fibres are chosen such that the average length of the fibres is less than 8mm, preferably less than 6mm long, and more preferably approximately 5mm long. The non-woven material is made by mixing the fibres together with PVA fibres and an appropriate amount of water to form a slurry. The PVA fibres can be "Mewlon" (TM) fibres of grade SMB or SML available from Unikita Ltd. In the fibrous form the "Mewlon" PVA dissolves at around 65°-70°C but when formed into the non-woven material, dissolves rapidly in cold water. The PVA fibre/rayon slurry is deposited on to a water-pervious moving conveyor, and then partially dried by

drawing water through holes in the water-pervious conveyor. The resulting partially dried web is then passed through an oven set at about 100°C to cure the mixture.

In the resulting non-woven material product, the PVA serves to bind the rayon fibres together. However, once the non-woven material comes into contact with water, the PVA dissolves or disintegrates, thereby destroying the bonding between adjacent rayon fibres with the result that the non-woven fabric rapidly disintegrates.

The inner walls 3, 4 in this embodiment are formed of a 30µ thick PVA film of a grade which is rapidly soluble in hot water, i.e. dissolves or disintegrates within 30 seconds at 50°C in water, but at 38°C is only very slowly soluble, and at room temperature is reasonably stable. An example of such a film is EC600 grade film available from NEDI of Middlewich, Cheshire, UK. Such film is not only soluble in hot water, but is also degraded by bacteria relatively quickly.

The manner in which the inner wall 3 is secured to the adhesive flange is shown in more detail in Figure 3. From Figure 3, it can be seen that the inner wall 3 is secured to an intermediate layer 11 of polyvinylchloride (PVC) film by means of intervening layer 12 of cyanoacrylate adhesive, and thence by adhesive layer 13 to PVC backing film 14 of the adhesive flange. Backing film 14 is coated with a thick layer of hydrocolloid adhesive 15 of known type. The adhesive layer 13 may be, for example, either a rubber resin or an acrylic-based adhesive.

The outer wall 1 of non-woven fabric, is secured to the PVC backing layer 14 of the adhesive flange by means of an adhesive layer 16 (e.g. a rubber resin or acrylic-based adhesive) at a position radially outwardly of the joint with the inner wall 3. The inner 3 and outer 1 walls are thus connected together, albeit indirectly, in the region of the adhesive flange as well as at the peripheral margins 5.

The ostomy bag liner illustrated in Figures 1 to 3 can serve as the inner bag in the two-bag arrangement illustrated in WO-A-94/12128. In such a case, an outer water-impermeable bag (not shown) formed of, for example, PVC, PVDC or EVA may be secured to the PVC backing layer 14 of the adhesive flange at a position radially outwardly of the outer wall 1, 16. Such an outer bag is connected to the flange in such a way as to be peelably or frangibly detached therefrom. Preferably the outer bag (not shown) is secured to the adhesive flange by means of a peelable adhesive layer which has lower adhesive strength than any of adhesive layers 16, 13 and 12. An advantage of the ostomy bag liner of the present invention is that, with the exception of the relatively small PVC components, and some of the adhesives, the ostomy bag is fully biodegradable. This is in contrast to many of the flushable ostomy bags proposed hitherto, in which an inner layer of non-biodegradable material is employed in order to render the ostomy bag water-impermeable.

It will readily be apparent that numerous

modifications and alterations may be made to the ostomy bag liner of the present invention without departing from the principles underlying the invention, and all such modifications and alterations are within the scope of this Application.

CLAIMS

1. A biodegradable, flushable ostomy bag liner comprising:
inner walls formed from polyvinylacetate/
polyvinylalcohol film of a grade which disintegrates
within 60 seconds in water at 50°C, but retains its
structural integrity in water at 25°C for at least two
days;
outer walls formed from a non-woven fabric which
disintegrates in water at 25°C;
means defining an opening in the inner and outer walls
for receiving bodily waste from the stoma of a
patient;
an adhesive flange for securing the ostomy bag liner
to the body wall of a patient, the adhesive flange
being secured to at least an inner wall of the liner
and surrounding the said opening; wherein the inner
and outer walls are unconnected and form a non-laminar
arrangement over the greater part of their area, but
are connected together around their peripheral margins
and in the region of the adhesive flange.
2. An ostomy bag liner according to Claim 1 wherein the
non-woven fabric is formed from biodegradable fibres.
3. An ostomy bag liner according to Claim 2 wherein the
biodegradable fibres comprise cellulose-based fibres.

4. An ostomy bag liner according to Claim 3 wherein the cellulose-based fibres are fibres formed from rayon, cellulose acetate or cotton.
5. An ostomy bag liner according to Claim 1 wherein the non-woven fabric is formed from synthetic fibres.
6. An ostomy bag liner according to any one of the preceding Claims wherein the average length of the fibres making up the non-woven fabric is less than 8mm.
7. An ostomy bag liner according to Claim 6 wherein the fibres have an average length of less than 6mm.
8. An ostomy bag liner according to any one of the preceding Claims wherein the non-woven fabric contains a water-soluble/water-disintegrable polymer capable of binding the fibres.
9. An ostomy bag liner according to Claim 8 wherein the water-soluble/water-disintegrable polymer is PVA.
10. An ostomy bag liner according to Claim 8 or Claim 9 wherein the fibres are present in a ratio of at least 5:1 by weight with regard to the polymer binder.
11. An ostomy bag liner according to Claim 10 wherein the

12

fibre:polymer binder ratio is at least 10:1.

12. An ostomy bag liner according to any one of the preceding Claims wherein the inner and outer walls are formed of such material, and have such thickness, as to be of substantially equivalent mechanical strength.
13. An ostomy bag liner substantially as described herein with reference to the accompanying drawings.
14. An ostomy bag comprising a water-impermeable, gas-impermeable outer bag and, contained therein, an ostomy bag liner as defined in any one of the preceding Claims, and an adhesive flange, the outer bag and ostomy bag liner being connected together at the adhesive flange.

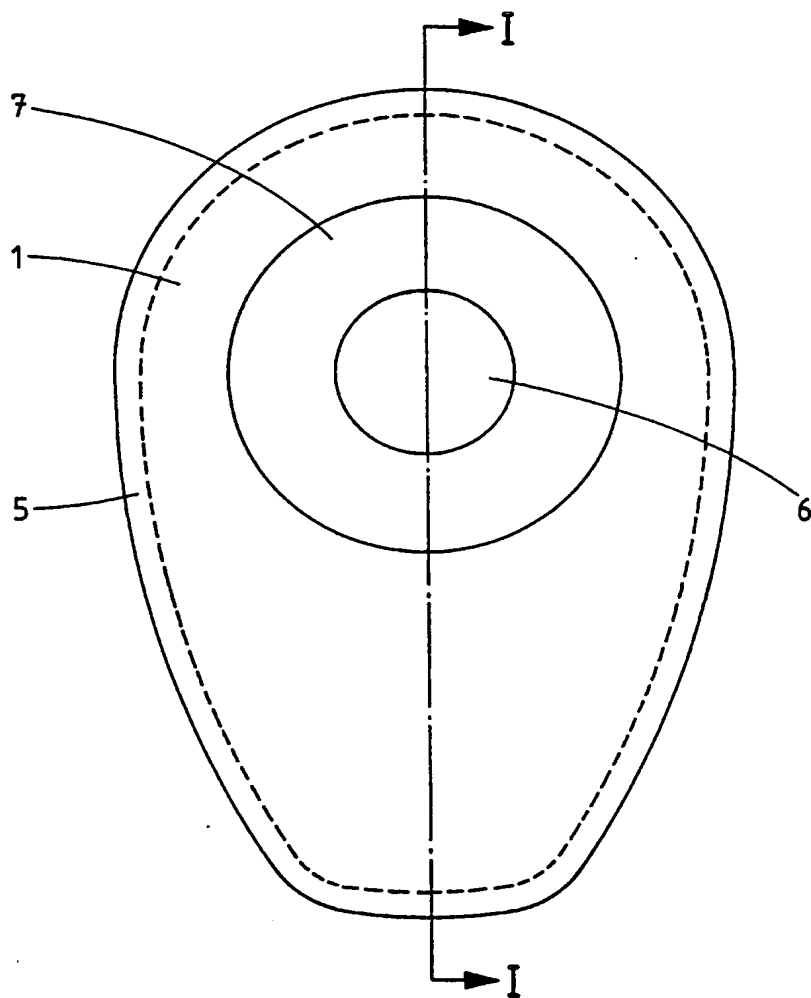


Figure 1

2/2

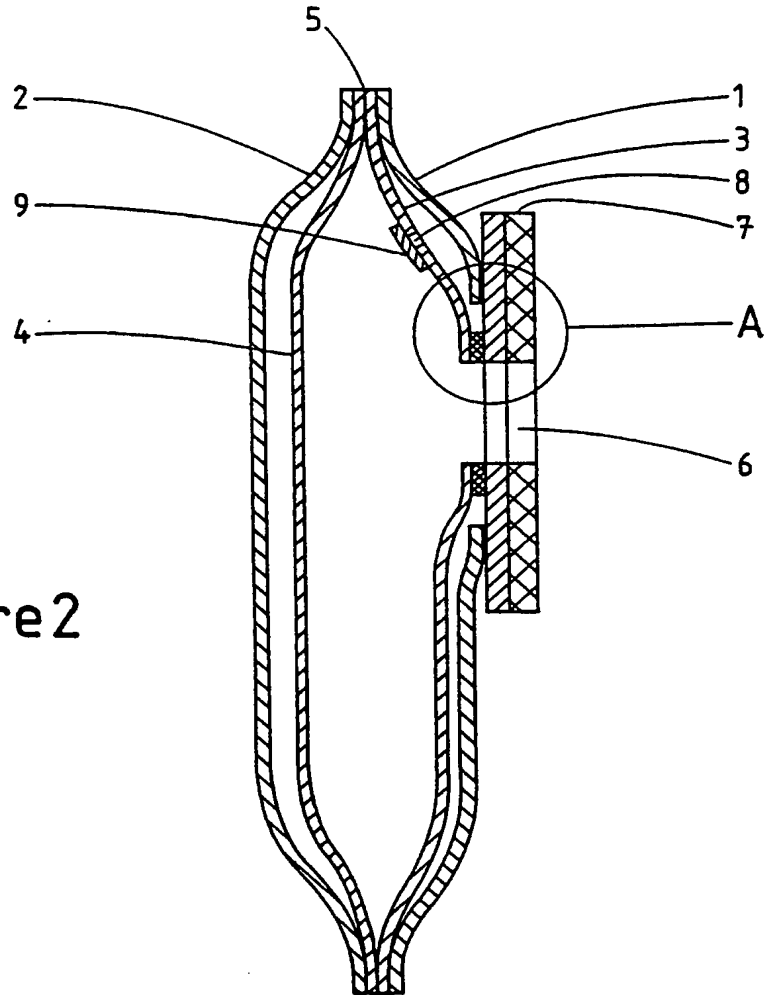


Figure 2

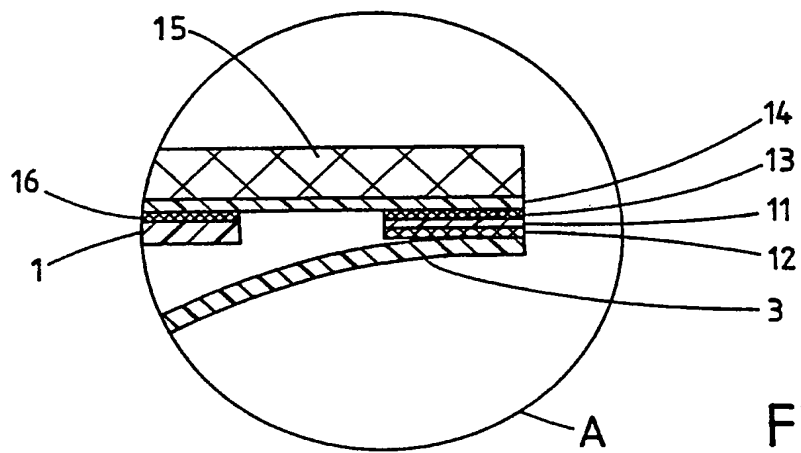


Figure 3

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 95/01424

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 A61F5/445

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO,A,94 12128 (WELLAND MEDICAL LTD.) 9 June 1994 cited in the application see the whole document ---	1
A	FR,A,2 524 306 (ENAK LTD) 7 October 1983 see figures ---	1
A	GB,A,2 083 762 (ENAK LTD) 31 March 1982 cited in the application ---	
A	EP,A,0 273 611 (GRACE W R & CO) 6 July 1988 ---	
A	EP,A,0 226 439 (GRACE W R & CO) 24 June 1987 ---	
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

25 October 1995

Date of mailing of the international search report

07. 11. 95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+ 31-70) 340-3016

Authorized officer

Sánchez y Sánchez, J

INTERNATIONAL SEARCH REPORT

In. .tional Application No
PCT/GB 95/01424

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB,A,2 211 196 (NIPPON SYNTHETIC CHEM IND) 28 June 1989 -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

In International Application No

PCT/GB 95/01424

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-9412128	09-06-94	AU-B- 5570894	22-06-94
		CA-A- 2150715	09-06-94
		GB-A- 2273052	08-06-94

FR-A-2524306	07-10-83	AU-B- 560206	02-04-87
		JP-A- 58203754	28-11-83
		US-A- 5108382	28-04-92

GB-A-2083762	31-03-82	US-A- 5108382	28-04-92

EP-A-0273611	06-07-88	AR-A- 240279	30-03-90
		AU-B- 606109	31-01-91
		AU-B- 8300487	30-06-88
		CA-A- 1320324	20-07-93
		JP-A- 63168347	12-07-88
		US-A- 4906495	06-03-90
		US-A- 5110390	05-05-92
		ZA-A- 8709620	23-06-88

EP-A-0226439	24-06-87	AU-B- 603076	08-11-90
		AU-B- 6601286	11-06-87
		DE-A- 3681135	02-10-91
		JP-B- 6074340	21-09-94
		JP-A- 62209144	14-09-87
		US-A- 4826493	02-05-89
		US-A- 4880592	14-11-89

GB-A-2211196	28-06-89	JP-A- 1160550	23-06-89
		DE-A- 3842323	29-06-89
		FR-A- 2624728	23-06-89
		US-A- 4946720	07-08-90
